

IBT Series - Sq Drive

LIGHT WEIGHT- Tough Titanium Alloy.
Meets critical OH&S requirements - **WREN is the answer**

LIGHTWEIGHT & FAST

COMPACT & TOUGH

POWERFUL & RELIABLE

VERSATILE & ACCURATE

SAFER

ISO CERTIFIED

AFFORDABLE

HOSE SWIVEL - 360° x 180° Hydraulic Hose Swivel Rotation.
Allows the operator to move hoses away from obstructions. Simply a must have feature on Hydraulic Wrenches - Safer

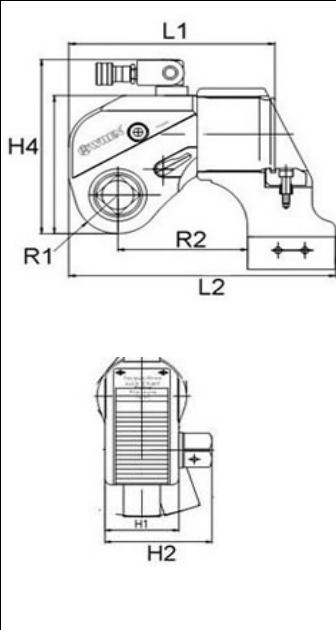
PUMPS - Wren Tools run off any 10,000 psi / 1,500 Retract double acting High Torque Wrench Pump

REACTION PAWL - Ensures the tool will ratchet without the need to be held - Safe Hands Free



REACTION ARM - Fully Adjustable. Can be rotated and adjusted to suit standard and long sockets. Fine adjustment permits reactions in tight places or on angled surfaces. Push release retainer at rear easy to use, secured away from damage.

IBT High Torque Series – Square Drives

	Part No.	Model	Sq Drive	Ft Lbs Torque	NM Torque	L2	H4	R1	H1	KG
						mm	mm	mm	mm	
	91062	IBT-1	3/4"	135 - 1359	183 - 1837	173	131	26	50	2.5
	91064	IBT-3	1"	334 - 3346	451 - 4512	229	176	34	68	5
	91066	IBT-5	1-1/2"	557 - 5571	752 - 7528	270	199	39	80	8
	91068	IBT-8	1-1/2"	797 - 7977	1078 - 10,780	293	217	47	90	11
	91070	IBT-10	1-1/2"	1148 - 11,482	1551 - 15,516	317	232	51	100	15
	91072	IBT-20	2-1/2"	1973 - 19,731	2666 - 26,664	383	270	59	120	26
	91074	IBT-25	2-1/2"	2569 - 25,697	3472 - 34,725	401	297	66	137	35
	91076	IBT-35	2-1/2"	3601 - 36,013	4866 - 48,666	465	332	77	153	50
	91078	IBT-50	2-1/2"	5328 - 53,280	7200 - 72,000	516	341	81	160	87

WREN are the worlds largest manufacturer of Hydraulic Torque Tools, with full ISO9001:2000 certification. Service, Support, Calibration & 12 Month Warranty is guaranteed direct through the importer. Large Stocks and Spare parts held in Australia.

Distributed Australia Wide by: **Hire Torque Tools**

Ph: 03 9710 1386

www.HireTorqueToolsVictoria.com.au



ALCO EXTENSION REACTION ARMS



Part No	To Suit	Length	
91078	IBT-1	18"	
91080	IBT-3	18"	
91082	IBT-5	18"	
91084	IBT-8	18"	
91086	IBT-10	18"	
91088	IBT-25	18"	

ALCO Extension Reaction Arms offer alternative reaction options. Attaching the ALCO arm is easy to attach in seconds. The arms clip onto the rear of the tool after removing the standard reaction arm. The Reaction arms provide a reaction point away from the tool in difficult circumstances.

SHIPPING CONTAINERS - Plastic



Part No	Material	Size	kg
91328	Plastic	50x50x45 cm	3

Shipping containers are available to ensure all tooling remains together and can be transported to site. Tough, lockable lid with 2 reinforced lifting handles. Containers can accommodate the pump, hose set, sockets and tool. The boxes offer weather-proof protection on site

SHIPPING CONTAINER - Metal



Part No	Material	Size	kg
91330	3mm Aluminium	50x50x60 cm	15

Shipping containers are available to ensure all tooling remains together and can be transported to site. Constructed using light weight 3mm Checker Plate aluminium with 4 lifting handles. Containers can accommodate pump, hose set, sockets and up to 6 tools. The torque chart and calibration certificate are attached conveniently inside the lid - no lost torque chart. The boxes offer weather-proof protection on site.

WRENCH PUMPS - Production Double Acting



Part No.	Model	Power Source	Flow Rate	Sump Capacity	dba	Remote	kg
91118	1 Port	240v	11 Lit / Min	10l	85	3m	32kg
25667	4 Port	240v	11 Lit / Min	10l	85	3m	33kg
25668	1 Port	AIR	9 Lit / Min	10l	86	3m	33kg
25669	4 Port	AIR	9 Lit / Min	10l	86	3m	33kg

PE-55 Hydraulic Wrench pumps use specific valving to operate Hyd Wrenches. The Advance side via the regulator operates from 1,500 - 10,000 to control the torque output. The auto shift valve regulates the retract side to 1,500 psi. Pumps can be Air or 240 Volt driven. Supplied with roll cage, Couplers, oil, remote control, 4" Gauge - Ready to go.



HYDRAULIC HOSE SETS - Double Acting

Part	Spec	Type	Length	Couplers	Test Tag	Weight
33521	4:1 Safety Rated	Twin Line	5 Meters	1/4" Screw Ball Type	Supplied Standard	
33525			7.5 Meters			
33527			10 Meters			
33529			15 Meters			